

amfori @BSCI
Trade with purpose



科技创新 引领未来



SCIENTIFIC AND
TECHNOLOGICAL
INNOVATION
LEADS THE
FUTURE

浙江省台州市路桥区蓬街镇小伍份小微企业工业园

XIAOWUFEN SMALL ENTERPRISE INDUSTRY PARK,
PENGJIE, LUQIAO, TAIZHOU, ZHEJIANG, CHINA

Tel: +86 0576 88016600

E-Mail: sales@zjfengyuan.com.cn

Web: www.zjfengyuan.com.cn

浙江峰源新材料科技有限公司

ZHEJIANG FENGYUAN NEW MATERIAL TECHNOLOGY CO., LTD



1996

PVC



2011



浙江峰源新材料科技有限公司是一家专业生产PVC软管、PVC粒料的国家级高新技术企业，公司位于塑料工业发达的浙江省台州市路桥区，设有浙江省级PVC软管研发中心。

公司目前拥有各型号挤管生产线28条，以及各种配套型号的PVC造粒生产线12条，已形成从原材料粒料的配方研发、制造，到软管设计、研发、制造，再到成品管的安装、包装检验，完整的一套生产流程。

公司拥有一支庞大的研发队伍，积累了大批优秀的技术管理人才，自主开发出符合美国NSF认证要求的PVC软质材料，打破长期以来由国外技术垄断的局面，成为国内软质PVC材料唯一一家获得NSF认证的企业；自主开发出符合德国KTW、W270认证要求的PVC材料，成为国内软质PVC材料仅有两家有此材料认证的企业之一，此外还拥有WRAS、ACS、REACH、CA65等多项国外产品认证，BSCI、WCA、SQP、ISO9001-2015等体系认证。拥有发明专利2项，实用新型专利39项。先后开发出行业里领先的花洒淋浴管、气动工具软管花园管等，已成为行业内最为专业的PVC粒料及软管大型制造商。

Zhejiang FengYuan New Material Technology Co.,Ltd is a Chinese National New and High Technology Enterprise located in plastic industry center Taizhou , Zhejiang . We are professional manufacturer for soft PVC compound and PVC hose, built-in Zhejiang province PVC hose research and development laboratory. We have 28 production lines for various soft PVC hoses, 12 production lines for various PVC compound. Our product includes all kinds of soft PVC compound and PVC shower hose, PVC garden hose, PVC air tool hose, PVC drinking water hose, other PVC multi-purpose hose etc. Control the quality from source, from compound to final product, with global product certificate like NSF, KTW, W270, WRAS, ACS, REACH, CA65 etc. Factory certificates include ISO9001-2015, BSCI, SQP, WCA etc.

Based on our enterprise spirit: "first time to be perfect and keep it all the time ", we keep introducing talents and advanced manufacturing facilities, creating lead products with good price and service, would like to build good relationship with clients from all over the world.

700 万米	2 亿元	41 项	10 亿元
月产能	年产值	专利授权	项目总投资
Monthly capacity (7 million meters)	Annual Value (30 million USD)	Owned patents (41 items)	Total Investment (150 million USD)

荣获多项权威认证

GLOBAL CERTIFICATION



美国
NSF
认证
NSF Drinking Water System Certification



法国ACS
French ACS Certification



英国WRAS
UK WRAS Certification



德国KTW、W270认证
German KTW, W270 Certification



国家高新技术企业
China National High-tech Enterprise



耐老化
ANTI-UV



-40~65°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion



房车/游艇 饮用水管

RV/Marine Drinking Water Hose



适合房车/游艇，或者其它需要补给饮用水用途的软管，4层结构。灵活轻便，过水材质符合美国NSF61-9饮用水认证，接头采用实心黄铜材质。

RV/Marine drinking water hose , 4 layers construction. Flexible and Lightweight, perfect to use when supplying drinking water , Solid Brass Fittings

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-RV-1/2	12	16	1/150	3.5/500
FY-RV-5/8	15	19.5	1/150	3.5/500
FY-RV-3/4	19	24	1/150	3.5/500



采用美国NSF饮用水认证材料的内层软管
Inner Hose With NSF Approved Material

通过美国加州65法案标准的保护中层
Protection Layer With CA65 Standard

高强度编织涤纶纱线
Cross Braided High Strength Polyester Yarn

特殊半透明哑光表面
Special Translucent Matt Surface

特殊的镀镍304不锈钢弹簧手柄
Special SS304 Spring Handle With Nickel Plated

黄铜配件
Brass Fitting



高弹柔性花园软管

Hybrid Flexible Garden Hose



符合饮用水标准的高弹花园软管，4层结构。柔韧轻便，适用于所有气候，不易打结，易于收纳，采用高端塑胶握把搭配铝制螺纹接头。

Hybrid Garden Hose with Drinking Water Safe, 4 layers construction. Flexible and Lightweight, All Weather Flexibility Anti-Kink Easy to Coil, Solid Aluminum Fittings



型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-HY-1/2	12	17	1/150	3.5/500
FY-HY-5/8	15	21	1/150	3.5/500
FY-HY-3/4	19	26	1/150	3.5/500



采用美国NSF饮用水认证材料的内层软管
Inner Hose With NSF Approved Material

通过美国加州65法案标准的保护中层
Protection Layer With CA65 Standard

高强度编织涤纶纱线
Cross Braided High Strength Polyester Yarn

柔韧耐用的外层
Flexible Durable Outer Layer

优秀的手持握感
Nice Handle Feeling

自有专利，独特设计的塑胶握把
Designed Patented Strong Grip





耐老化
ANTI-UV



-10~60°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink




柔软轻便
Flexible



耐磨损
ANTI-Abrasion


中档花园软管 Medium Duty Garden Hose

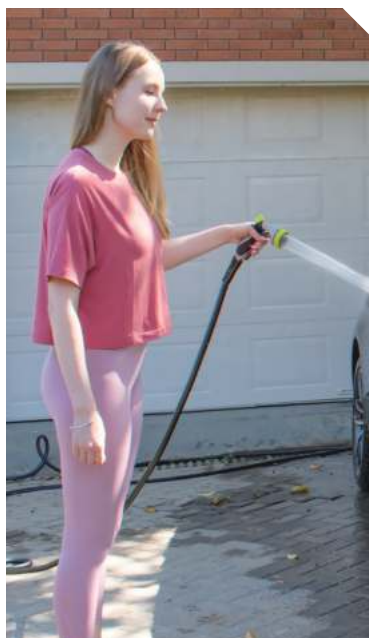

标准管径的中端花园软管，产品管身和铜配件均采用全新材料生产，适合一般DIY市场和经销商售卖。

Standard size medium duty hose , produced with all new PVC material , brass fittings and threading for long time use . Recommend to general DIY market .

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-MD-1/2	11	15	0.8/120	3/450
FY-MD-5/8	15	19	0.8/120	3/450
FY-MD-3/4	18	23	0.8/120	3/450



内层采用优质PVC材料
Inner Layer With High Quality PVC Material

高强度编织涤纶纱线
Cross Braided High Strength Polyester Yarn

外层有多种颜色可选
Outer Protection Layer, Multi-color Available

标准3/4美式花园螺纹，黄铜接头
Standard Brass Fitting



简易塑料握把，方便拧紧接头
Plastic Handle , Easy For Threading




普通花园软管 Light Duty Garden Hose



经济型软管，内软管可以使用高达70%比例的回收PVC材料，重量轻，价格实惠，具有基本的水管功能，利于打开新市场，多种颜色可定制。

Economy choice with light duty hose , use up to 70% recycled PVC material for the inner hose tube , light weight with basic watering function . A good start to entering market .

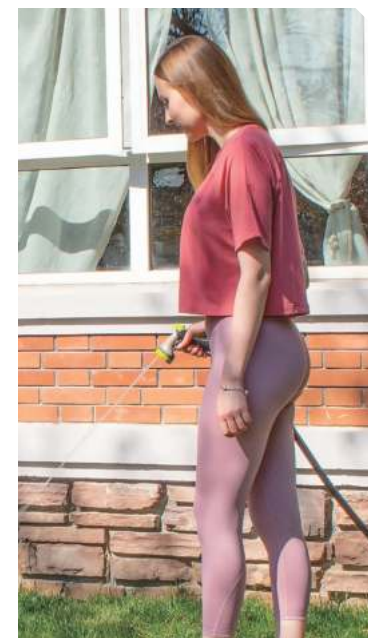

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-LD-1/2	11	14.5	0.7/100	2.1/300
FY-LD-5/8	15	18.8	0.7/100	2.1/300
FY-LD-3/4	18	22.5	0.7/100	2.1/300



内层可采用高达70%的回收材料
Inner Layer With Up To 70% Recycled Material

高强度编织涤纶纱线
Cross Braided High Strength Polyester Yarn

高质量保护外层
Outer High Quality Protection Layer

经济性塑料螺帽搭配铜套
Economy Plastic Threading



普通黄铜配件
Brass Fitting





耐老化
ANTI-UV



-10~60°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion

轻型高压清洗机管

Light Duty High Pressure Washing Machine Hose



适用于家庭用的清洗机工作压力200kg，爆破压力600kg，外层添加耐磨成分中间采用全编织工艺，有效的耐压防爆。

The washing machine suitable for household use has a working pressure of 200kg and a burst pressure of 600kg. The outer layer is added with wear-resistant components, and the middle layer adopts full-weave technology, effectively resisting pressure and preventing explosion.

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-HPW-1/4	6	11	18/2700	54/8100



内层PVC/PE，高弹柔软、耐压防爆
Inner layer PVC/PE, highly elastic and flexible, pressure-resistant and explosion-proof

采用高强度涤纶丝制作
Made of high-strength polyester yarn

外层PVC，耐磨，耐压防爆
Outer layer PVC, wear-resistant, pressure-resistant, and explosion-proof

φ9*M14*1.5外螺纹快插

Quick-Connect Male Thread



M22大头帽配14插杆

M22 Large Head Cap with 14mm Insert Rod



轻型高压清洗机管

Light Duty High Pressure Washing Machine Hose



适用于家庭用的清洗机工作压力200kg，爆破压力600kg，外层添加耐磨成分中间采用全编织工艺，有效的耐压防爆。

The washing machine suitable for household use has a working pressure of 200kg and a burst pressure of 600kg. The outer layer is added with wear-resistant components, and the middle layer adopts full-weave technology, effectively resisting pressure and preventing explosion.

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-HPW-1/4	6	11	18/2700	54/8100



内层PVC/PE，高弹柔软、耐压防爆
Inner layer PVC/PE, highly elastic and flexible, pressure-resistant and explosion-proof

采用高强度涤纶丝制作
Made of high-strength polyester yarn

外层PVC，耐磨，耐压防爆
Outer layer PVC, wear-resistant, pressure-resistant, and explosion-proof

M14螺纹帽子配黄铜快插

M14 Threaded Cap with Brass Quick-Connect



M22大头帽配14插杆

M22 Large Head Cap with 14mm Insert Rod





耐老化
ANTI-UV



-40~65°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion

扁布水管 Flat Fabric Garden Hose



扁布水管采用PVC内管和外层扁平编织布套制成，重量比普通花园软管轻60%，管体柔韧且不会扭结。管身爆破压力高达 80 公斤/ 1200 psi。（此产品长度固定，不可伸缩）

Fengyuan flat fabric garden hose is making with inner PVC tube and outer flat braided fabric cover , 60% lighter weight than normal garden hose , flexible and without kink . Bursting pressure up to 100 bar / 1500 psi . This fabric hose is not expandable .

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-FF-1/2	10	16	1/150	6/900
FY-FF-5/8	15	22	1/150	6/900
FY-FF-3/4	18	25	1/150	6/900



内层采用高品质PVC管
Inner High Quality PVC Tube

外层扁平编织布套
Outer Flat Braided High Strength Fabric Cover

独特专利设计的黄铜或铝制接头
Designed Brass Fitting



软质PVC握把
Soft PVC Holder Grip



圆形布编织园艺水管 Round Fabric Garden Hose



这条峰源圆形布管，管身由PVC内管加高强度编织布套组成，比一般的水管重量轻50%，管身柔软，不易打结。爆破压可达120公斤。（此条圆布管长度不可膨胀伸缩）

Fengyuan round fabric garden hose is making with inner PVC tube and outer high strength braided fabric cover , 50 % lighter weight than normal garden hose , flexible and anti-kink . Bursting pressure up to 80 bar / 1200 psi . This fabric hose is not expandable .

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-RF-1/2	10	15	1/150	8/1200
FY-RF-5/8	15	21	1/150	8/1200
FY-RF-3/4	18	24	1/150	8/1200



环保高品质PVC内管
Inner High Quality PVC Tube

高强度圆形编织外布套
Outer Round Braided High Strength Fabric Cover

灰色铝接头

Oxidative Dark Grey Aluminum Fitting



软质PVC护套
Soft PVC Holder Grip





耐老化
ANTI-UV



-40~65°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion

一代加热管 First-generation Heating Hose



适用于房车连接，畜牧饮用水，可以有效避免在低温下水管结冰问题。

Suitable for RV connections and livestock drinking water, it can effectively prevent water pipes from freezing at low temperatures.

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-HRVA-5/8	16	20	0.8/120	3.5/500



采用美国NSF饮用水认证材料的内层软管
Inner Hose With NSF Approved PVC Material

高强度编织涤纶纱线
Cross Braided High Strength Polyester Yarn

绝缘PVC，防止漏电
Insulated PVC to Prevent Electric Leakage

加热线
Heating Cable

耐磨护套
Abrasion Resistant Exterior Jacket

3/4黄铜接头
3/4 Brass Connector



智能温控感应器
Intelligent Heating System Protect The Water From Freezing



三代加热管 Third-generation Heating Hose



适用于房车连接，畜牧饮用水，可以有效避免在低温下水管结冰问题。在5°C左右温度，温控器闭合，水管开始加热，当水管温度或者环境温度 > 10°C，温控器断开，停止加热

Suitable for RV connections and livestock drinking water, it can effectively prevent water pipes from freezing in low temperatures. When the temperature reaches around 5°C, the thermostat closes and the water pipe starts to heat up. Once the water pipe temperature or ambient temperature exceeds 10°C, the thermostat opens and heating stops



型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-HRVB-1/2	12	18	0.8/120	3.5/500
FY-HRVB-5/8	16	23.5	0.8/120	3.5/500



采用美国NSF饮用水认证材料的内层软管
Inner Hose With NSF Approved PVC Material

高强度编织涤纶纱线
Cross Braided High Strength Polyester Yarn

绝缘PVC，防止漏电
Insulated PVC to Prevent Electric Leakage


加热线
Heating Cable

耐磨护套
Abrasion Resistant Exterior Cover

3/4铜镀镍接头
3/4 Brass Fitting With Nickel Plated



升级软质PVC防漏握把
Upgraded Fully Sealed PVC Protective Holder Grip Against Leakage

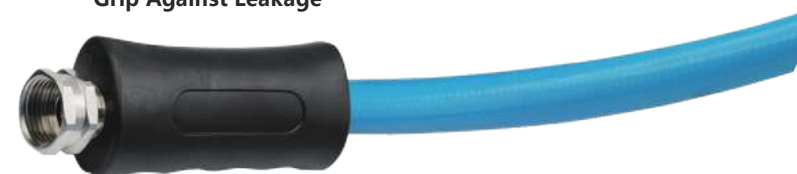



耐老化
ANTI-UV



-10~60°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion



FENGYUAN

三孔洒水管 3-Tube Sprinkler Hose



三孔洒水管采用全新优质PVC材料制成，将洒水和滴灌两种功能合二为一，白色条纹的一侧朝上用于洒水，白色条纹向下则用于滴灌。本产品非常适合浇灌草坪和花园区域，有利于环保和节约用水。

Fengyuan sprinkler hose made with high quality and flexible PVC material, sprinkler and soaker two functions in one, white stripes to show up side for sprinkling and the other side stripes down for soaking. Ideal for watering lawns and narrow garden areas, saving water.

型号 Model	直径 Diameter	厚度 Thickness	工作压力 Working Pressure	
	mm	mm	MPa/PSI	
FY-SP-1/2	22x6	1	0.6/90	
FY-SP-5/8	26x7	1.1	0.6/90	

扁渗透布管 Flat Fabric Soaker Hose





该产品重量轻便，管身柔软不打折，通过低压渗水提供温和，稳定，有效的滴灌浇水，这种渗水方法通过将水直接释放到地面上来减少空气中的蒸发，达到环保和节水的作用。

Fengyuan flat fabric soaker hose provide gentle, equal and efficient watering via low pressure Drip irrigation, the dripping method watering reduces evaporation by slowly releasing water directly into the ground. Lightweight and flexible.

型号 Model	直径 Diameter	厚度 Thickness	工作压力 Working Pressure	
	mm	mm	MPa/PSI	
FY-FS-1/2	22x6	0.7	0.6/90	
FY-FS-5/8	26x7	0.7	0.6/90	



黄铜螺纹接头或快插接头 Brass Fitting Or Fast Connector



喷出的水雾可达1.8米，
创造一道水雾壁
Create A Wall Of Soaking Mist

可拆卸水塑料帽，用于增加洒水长度
(多条水管连接)
Removeable cap for
extending more length



耐磨，方便拖拽
适用于所有气候
Wear-resistant, All Weather



提供塑料螺纹接头或者快插式接头 Plastic Fitting Or Fast Connector



渗水孔
Water weeping holes

柔软PVC内扁管
Flat flexible PVC inner hose

高强度尼龙外编织布套
High-strength Nylon outer
braided cover

快速修复接头
Quick Repair Kits

可拆卸式螺纹接头，方便延伸长度
(多条水管连接)
Removeable cap for extending
more length





耐老化
ANTI-UV



-40~65°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion



PVC弹性扁管 PVC Flexible Flat Hose



适用于花园浇花，采用扁平设计，缩小了储物空间。在4bar压力下，水管会变回圆形。

Suitable for watering gardens, it adopts a flat design to minimize storage space. Under 4 bar pressure, the water hose will return to a circular shape

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-HFF-1/2	12.7	16.7	0.6/90	2.2/320
FY-HFF-5/8	14	18	0.6/90	2.2/320
FY-HFF-3/4	18	22	0.6/90	2.2/320

PVC弹性扁管 PVC Flexible Flat Hose



适用于花园浇花，采用扁平设计，缩小了储物空间。在4bar压力下，水管会变回圆形。

Suitable for watering gardens, it adopts a flat design to minimize storage space. Under 4 bar pressure, the water hose will return to a circular shape



型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-HFF-1/2	12.7	16.7	0.6/90	2.2/320
FY-HFF-5/8	14	18	0.6/90	2.2/320
FY-HFF-3/4	18	22	0.6/90	2.2/320



耐寒耐腐蚀PVC
Cold-resistant and corrosion-resistant PVC


采用高强度涤纶丝制作
Constructed from high-strength polyester yarn

耐寒耐磨PVC
Cold-resistant and wear-resistant PVC

弹簧护套
Spring Protector



弹簧护套
Spring Protector

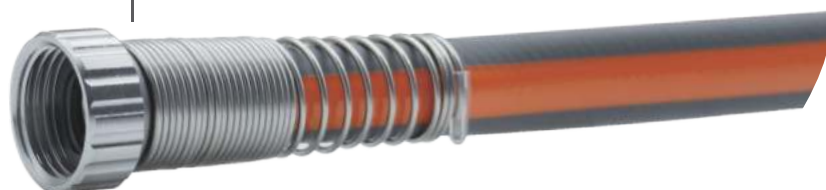

耐寒耐腐蚀PVC
Cold-resistant and corrosion-resistant PVC

采用高强度涤纶丝制作
Constructed from high-strength polyester yarn

耐寒耐磨PVC
Cold-resistant and wear-resistant PVC

3/4 旋转铝接头
3/4" Swivel Aluminum Connector



3/4 旋转铝接头
3/4" Swivel Aluminum Connector





耐老化
ANTI-UV



-20~65°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion



FENGYUAN

欧式花园软管*轻便级Air Garden Hose *air



峰源 轻便级 欧式花园软管采用三层结构制造，轻便简单耐用，经济实惠，具备基本的浇水功能。材料可符合国标，RoHS 2.0，REACH，加州65等环保标准（如有需要）。提供多种尺寸，以及多种颜色搭配设计，适用于一般DIY园艺市场，超市促销，配套绕管器等。

Fengyuan garden hose *air is made in 3 layers , comfortable and economy level with basic watering function . Material can pass Rohs 2.0 and Reach standard under request . Available for different designs and colors . Good for promotion DIY market .

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-AGB-1/2	11	15	1/150	3/450
FY-AGB-3/4	19	24.5	1/150	3/450
FY-AGA-1"	25	31.5	1/150	3/450



欧式花园软管*轻便级Air Garden Hose *air



峰源 轻便级 欧式花园软管采用三层结构制造，轻便简单耐用，经济实惠，具备基本的浇水功能。材料可符合国标，RoHS 2.0，REACH，加州65等环保标准（如有需要）。提供多种尺寸，以及多种颜色搭配设计，适用于一般DIY园艺市场，超市促销，配套绕管器等。

Fengyuan garden hose *air is made in 3 layers , comfortable and economy level with basic watering function . Material can pass Rohs 2.0 and Reach standard under request . Available for different designs and colors . Good for promotion DIY market .


型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-AGY-1/2	11	15	1/150	3/450
FY-AGY-3/4	19	24.5	1/150	3/450
FY-AGY-1"	25	31.5	1/150	3/450



可符合Reach 标准的内管*轻便级
Reach Standard Inner Hose*air

高强度的编织纱线层
Braid yarn keep strength


哑光外表面可带条纹和印刷LOGO
Matt Outer Surface
With Strips And Marks

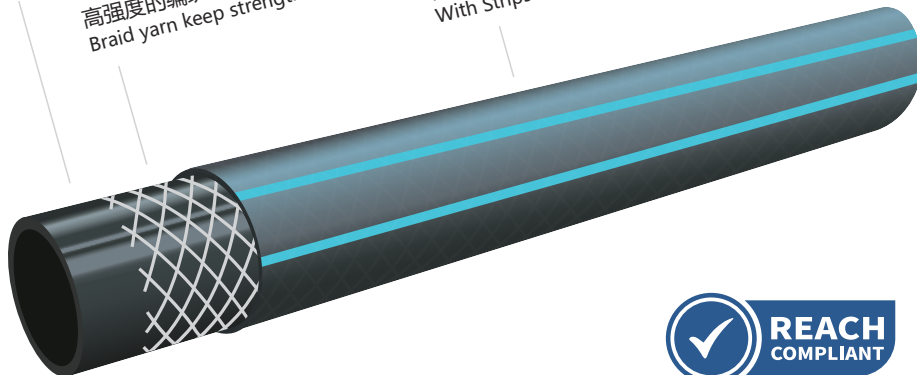

可符合Reach 标准的内管*轻便级
Reach Standard Inner Hose*air

高强度的编织纱线层
Braid yarn keep strength

半透明外表面可带彩色条纹和印刷logo带条纹
Translucent Outer Surface
With Strips And Marks

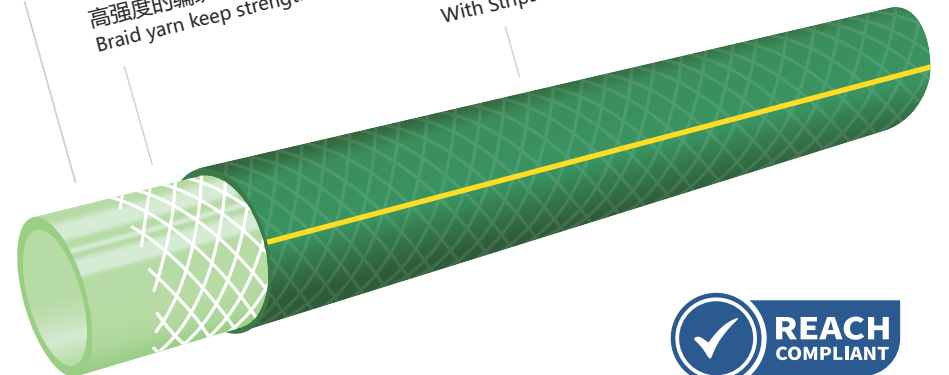



耐老化
ANTI-UV



-30~75℃
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion



FENGYUAN

欧式花园软管*专业级K Garden Hose *pro K



峰源 专业级 欧式花园软管采用四层结构制造，管体柔软，牢固结实，性价比高，具有更优秀的通水功能，适合广泛的温度和气候条件。材料可符合国标，RoHS 2.0，REACH，加州65等环保标准（如有需要）。提供多种尺寸，以及多种颜色搭配设计。适用于专业DIY园艺市场，超市促销，配套绕管器等。

Fengyuan garden hose *pro is made in 4 layers , professional level with better watering . Suitable for more weather range. Material can pass RoHS 2.0 and Reach standard under request . Available for different designs and colors .

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-PBO-1/2	12.7	17.7	1/150	3.5/500
FY-PBO-3/4	19	26	1/150	3.5/500
FY-PBO-1"	25	33	1/150	3.5/500




可符合Reach 标准的内管*专业级
Reach Standard Inner Hose


防护加强层
Protection Strength Layer

高强度的编织纱线层
Braid yarn keep strength

光滑平整的外管可带彩色条纹和印刷logo
Smooth Outer Surface With Strips And Marks

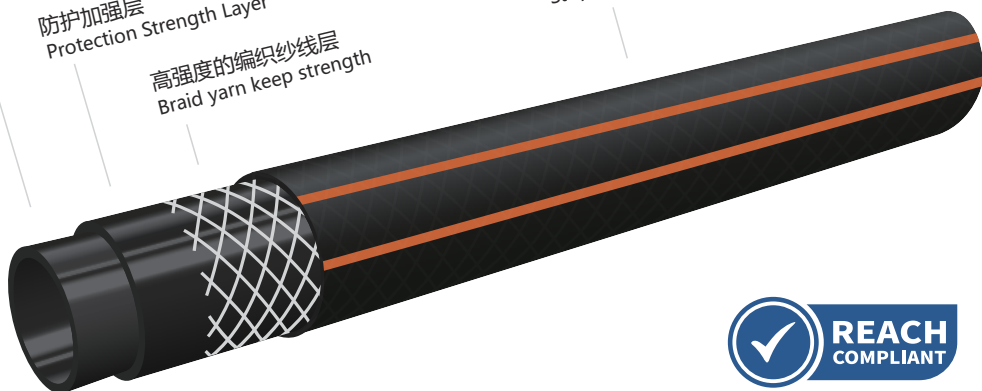

欧式花园软管*专业级C Garden Hose *pro C

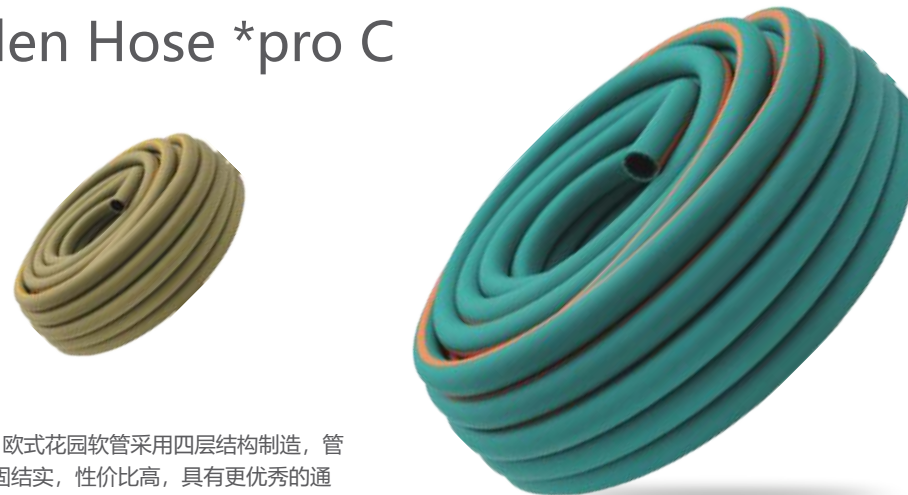

峰源 专业级 欧式花园软管采用四层结构制造，管体柔软，牢固结实，性价比高，具有更优秀的通水功能，适合广泛的温度和气候条件。材料可符合国标，RoHS 2.0，REACH，加州65等环保标准（如有需要）。提供多种尺寸，以及多种颜色搭配设计。适用于专业DIY园艺市场，超市促销，配套绕管器等。

Fengyuan garden hose *pro is made in 4 layers , professional level with better watering . Suitable for more weather range. Material can pass RoHS 2.0 and Reach standard under request . Available for different designs and colors .

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-PCO-1/2	11	15	1/150	3/450
FY-PCO-3/4	19	24.5	1/150	3/450
FY-PCO-1"	25	31.5	1/150	3/450




可符合Reach 标准的内管*专业级
Reach Standard Inner Hose

防护加强层
Protection Strength Layer

高强度的编织纱线层
Braid yarn keep strength

光滑平整的外管可带彩色条纹和印刷logo
Smooth Outer Surface With Strips And Marks

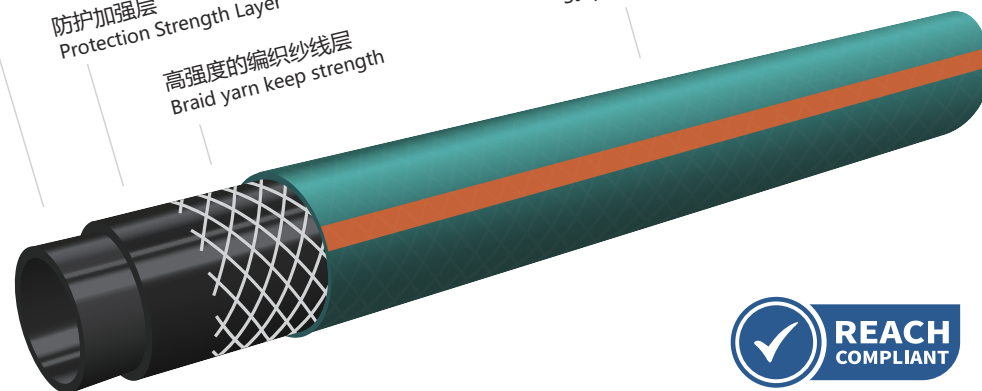



耐老化
ANTI-UV



-40~80°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible




耐磨损
ANTI-Abrasion



FENGYUAN


欧式花园软管*极致级 Garden Hose *max

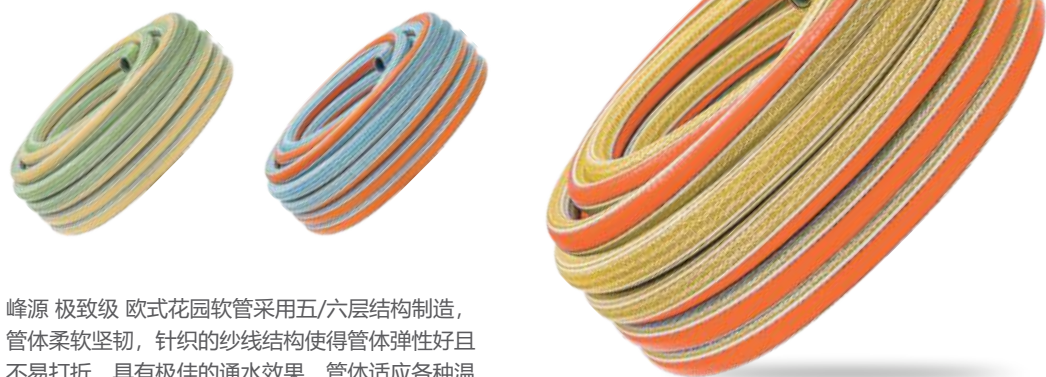


峰源 极致级 欧式花园软管采用五/六层结构制造，管体柔软坚韧，针织的纱线结构使得管体弹性好且不易打折，具有极佳的通水效果，管体适应各种温度和气候条件，方便存储。材料可符合国标，RoHS 2.0, REACH, 加州65等环保标准（如有需要），提供多种尺寸，以及多种颜色搭配设计。适用于高端DIY园艺市场。

Fengyuan garden hose *max is made in 5 layers, flexible soft and strong hose with best watering. Knitted yarn avoid torsion. Suitable for all weather range. Material can pass RoHS 2.0 and Reach standard under request. Available for different designs and colors.

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-MYO-1/2	12	17	1/150	3/450
FY-MYO-3/4	19	25	1/150	3/450
FY-MYO-1"	25	32	1/150	3/450

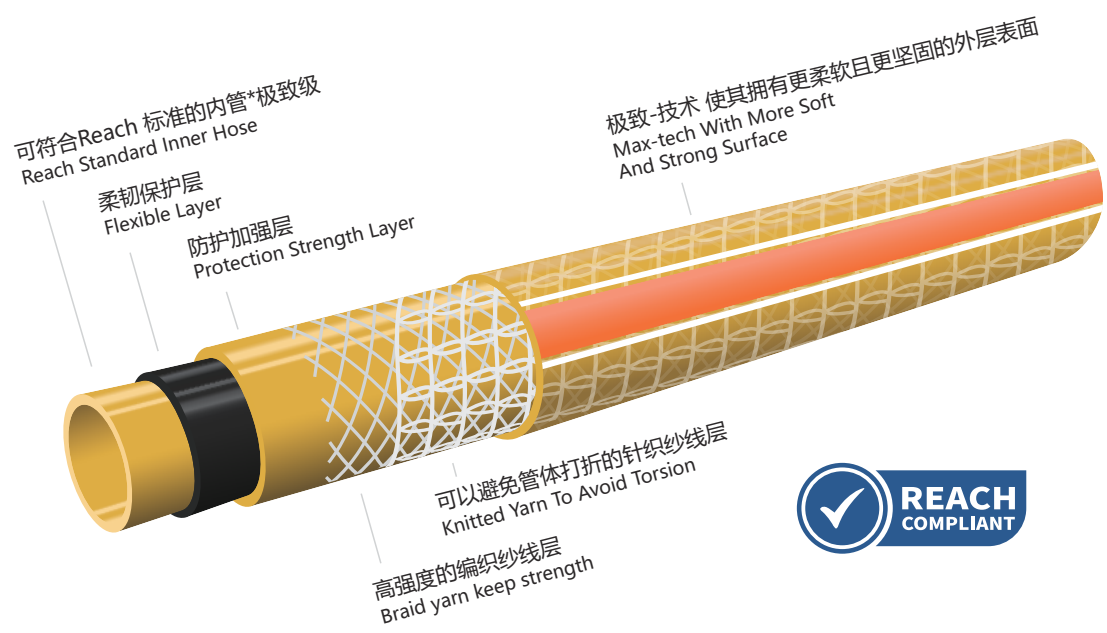


欧式花园软管*极致级 Garden Hose *max

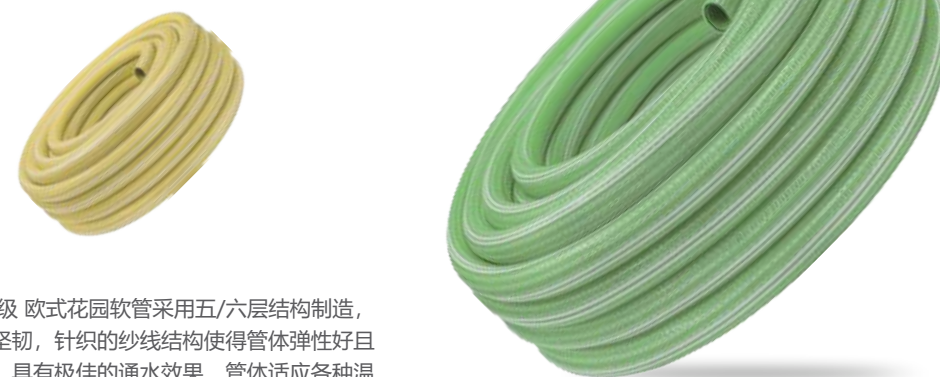

峰源 极致级 欧式花园软管采用五/六层结构制造，管体柔软坚韧，针织的纱线结构使得管体弹性好且不易打折，具有极佳的通水效果，管体适应各种温度和气候条件，方便存储。材料可符合国标，RoHS 2.0, REACH, 加州65等环保标准（如有需要），提供多种尺寸，以及多种颜色搭配设计。适用于高端DIY园艺市场。

Fengyuan garden hose *max is made in 5 layers, flexible soft and strong hose with best watering. Suitable for all weather range. Material can pass RoHS 2.0 and Reach standard under request. Available for different designs and colors.

型号 Model	内径 Inner Diameter	外径 Outer Diameter	工作压力 Working Pressure	爆破压力 Burst Pressure
	mm	mm	MPa/PSI	MPa/PSI
FY-MGT-1/2	11	15	0.7/100	2.1/300
FY-MGT-3/4	19	24.5	0.6/90	1.8/270
FY-MGT-1"	25	32	0.6/90	1.8/270

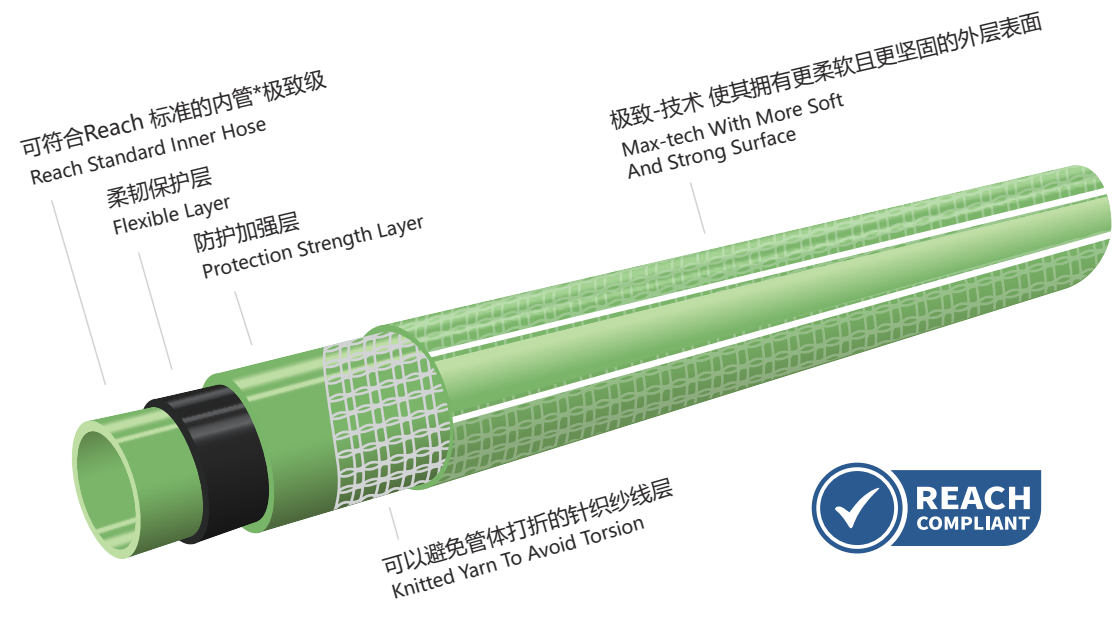



耐老化
ANTI-UV



-25~65℃
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion



室外耐压浇水软管

Outdoor Pressure-resistant
Watering Hose

一般家庭用，普通日式花园浇水软管采用三层结构制造，编织构造加强了保压能力，磨砂的外表面能够有效减少脏污附着以及软管之间的粘连，黑色抗菌内管减少藻类和菌类的滋生。提供多种尺寸，以及多种颜色设计。

For general household use, the typical Japanese-style garden watering hose is manufactured with a three-layer structure. The woven construction enhances its pressure resistance. Its frosted surface effectively reduces dirt adhesion and the sticking between hoses. The black anti-bacterial inner tube reduces the growth of algae and bacteria. Available in various sizes and designed in multiple colors.



型号 MODEL	内径 mm INNER DIAMETER	外径 mm OUTER DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-07-JA	7.5	11	0.8/120	3/450
FY-09-JA	9	13	0.8/120	3/450
FY-12-JA	12	17	0.8/120	3/450
FY-15-JA	15	20	0.8/120	3/450

室外耐压浇水软管

Outdoor Pressure-resistant
Watering Hose

一般家庭用，普通日式花园浇水软管采用三层结构制造，编织构造加强了保压能力，磨砂的外表面能够有效减少脏污附着以及软管之间的粘连，黑色抗菌内管减少藻类和菌类的滋生。提供多种尺寸，以及多种颜色设计。

For general household use, the typical Japanese-style garden watering hose is manufactured with a three-layer structure. The woven construction enhances its pressure resistance. The woven construction enhances its pressure resistance. Its frosted surface effectively reduces dirt adhesion and the sticking between hoses. The black anti-bacterial inner tube reduces the growth of algae and bacteria. Available in various sizes and designed in multiple colors.




型号 MODEL	内径 mm INNER DIAMETER	外径 mm OUTER DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-07-JB	7.5	11	0.8/120	3/450
FY-09-JB	9	13	0.8/120	3/450
FY-12-JB	12	17	0.8/120	3/450
FY-15-JB	15	20	0.8/120	3/450



藻類の成長を防ぎ
高弹柔软防藻类滋生
Inner high quality black tube
Prevent algae growth

織り込まれ、強化された
采用高强度涤纶丝制作
Cross braided high strength polyester yarn

でホース同士のくっつきを軽減し
耐磨，耐高低温减少软管之间的粘连
Wear-resistant, all weather conditions
reduce sticking of surface



藻類の成長を防ぎ
高弹柔软防藻类滋生
Inner high quality black tube
Prevent algae growth

織り込まれ、強化された
采用高强度涤纶丝制作
Cross braided high strength polyester yarn

でホース同士のくっつきを軽減し
耐磨，耐高低温减少软管之间的粘连
Wear-resistant, all weather conditions
reduce sticking of surface





耐老化
ANTI-UV



-25~65°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion



室外耐压浇水软管

Outdoor Pressure-resistant Watering Hose

一般家庭用，普通日式花园浇水软管采用三层结构制造，编织构造加强了保压能力，磨砂的外表面能够有效减少脏污附着以及软管之间的粘连，黑色抗菌内管减少藻类和菌类的滋生。提供多种尺寸，以及多种颜色设计。

For general household use, the typical Japanese-style garden watering hose is manufactured with a three-layer structure. The woven construction enhances its pressure resistance. Its frosted surface effectively reduces dirt adhesion and the sticking between hoses. The black anti-bacterial inner tube reduces the growth of algae and bacteria. Available in various sizes and designed in multiple colors.




型号 MODEL	内径 mm INNER DIAMETER	外径 mm OUTER DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-07-JC	7.5	11	0.8/120	3/450
FY-09-JC	9	13	0.8/120	3/450
FY-12-JC	12	17	0.8/120	3/450
FY-15-JC	15	20	0.8/120	3/450

耐寒耐压软管

Cold & Pressure - Resistant Hose

网格编织结构可以有效保持软管的水压，光滑细腻的拉槽凹凸表面可以减少管体的打折和软管之间的粘连，维持良好的软管手感，特殊抗寒材料，冬季不易脆裂，透明管体可以看到管体中的水流，适合冬季低温时使用，提供多种尺寸，以及多种颜色设计。

The woven structure effectively maintains water pressure in the hose. The smooth and delicate groove surface reduces kinking of the hose and sticking between hoses, maintaining a good handle feel. Special cold-resistant materials prevent cracking in winter, while the transparent body allows for observing the water flow inside, suitable for use in low temperatures during winter. Available in various sizes and designed in multiple colors.

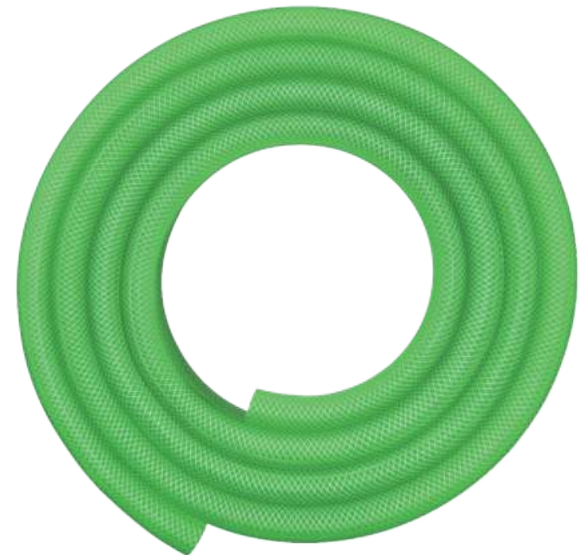


型号 MODEL	内径 mm INNER DIAMETER	外径 mm OUTER DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-07-JD	7.5	11	0.8/120	3/450
FY-09-JD	9	13	0.8/120	3/450
FY-12-JD	12	17	0.8/120	3/450
FY-15-JD	15	20	0.8/120	3/450

藻類の成長を防ぎ
高弹柔软防藻类滋生
Inner high quality black tube
Prevent algae growth

織り込まれ、強化された
采用高强度涤纶丝制作
Cross braided high strength polyester yarn

でホース同士のくっつきを軽減し
耐磨，耐高低温减少软管之间的粘连
Wear-resistant, all weather conditions
reduce sticking of surface



高強度材料、低温抵抗
耐低温透明材料，防止脆化
High quality material,
extreme low temperature resistance

織り込まれ、強化された
采用高强度涤纶丝制作
Cross braided high strength polyester yarn

特別なホース表面
特殊凹凸表面，低温时不易硬化
Special uneven surface,
easy to work at low temperature





耐老化
ANTI-UV



-25~65°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion



室外耐压浇水软管 专业级

Outdoor Pressure-resistant Watering Hose Pro

专业级日式花园软管采用四/五层结构制造，管体柔软坚韧，编织的网格纱线结构提供优秀的保压能力，具有极佳的通水效果，管体适应各种温度和气候条件，方便存储。材料可符合美国NSF饮用水标准（如有需要），提供多种尺寸，以及多种颜色设计。

The professional-grade Japanese-style garden hose is manufactured with a four/five-layer structure, ensuring a soft, flexible, and durable hose body. The woven grid yarn structure provides excellent pressure resistance and ensures outstanding water flow. The hose is available to a wide temperatures range and different weather conditions, easy for storage. The materials can pass American NSF61-9 drinking water standards if required. Available in various sizes and designed in multiple colors."



型号 MODEL	内径 mm INNER DIAMETER	外径 mm OUTER DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-07-JE	7.5	11	0.8/120	3.2/480
FY-09-JE	9	13	0.8/120	3.2/480
FY-12-JE	12	17	0.8/120	3.2/480
FY-15-JE	15	20	0.8/120	3.2/480

白い保護層
高弹柔软
flexible white protection layer

織り込まれ、強化された
采用高强度涤纶丝制作
Cross braided high strength polyester yarn

でホース同士のくっつきを軽減し
耐磨，耐高低温减少软管之间的粘连
Wear-resistant, all weather conditions
reduce sticking of surface

黒い抗菌藻類層
抗菌防藻
Black middle layer, Antibacterial algae

NSF材料認定内層
饮用水级别
NSF (61-9 USA) approved
material, drinking water safe




特殊钩编防打结水管 极致级

Knitted Anti-kink Garden Hose

极致级特殊钩编日式花园软管采用四/五层结构制造，管体柔软坚韧有弹性，特殊的钩编的纱线结构提供优秀的抗扭曲能力，具有极佳的通水效果，管体可适应各种温度和气候条件，方便存储。材料可符合美国NSF饮用水标准（如有需要），提供多种尺寸，以及多种颜色设计。

"The ultimate-grade special knitted Japanese-style garden hose is manufactured with a four/five-layer structure, ensuring a soft, flexible, durable, and elastic hose tube. The special knitted yarn structure provides excellent resistance to kinking and ensures outstanding water flow. The hose is available to a wide temperatures range and different weather conditions, easy for storage. The materials can pass American NSF61-9 drinking water standards if required. Available in various sizes and designed in multiple colors."

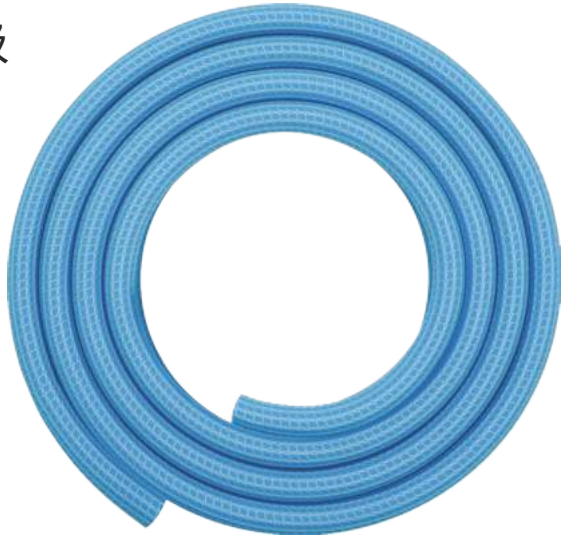

型号 MODEL	内径 mm INNER DIAMETER	外径 mm OUTER DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-12-JF	12	17	0.7/100	2.1/300
FY-15-JF	15	20	0.7/100	2.1/300

蓝い保護層
高弹柔软
flexible white protection layer

强化特殊編み込み構造
采用高强度涤纶丝针织
Knitted anti-kink polyester yarn layer

でホース同士のくっつきを軽減し
耐磨，耐高低温减少软管之间的粘连
Wear-resistant, all weather conditions
reduce sticking of surface

黒い抗菌藻類層
抗菌防藻
Black middle layer, Antibacterial algae

NSF材料認定内層
饮用水级别
NSF (61-9 USA) approved
material, drinking water safe





耐老化
ANTI-UV



-40~65℃
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion




全编织风炮管

All Braided Air Barrel

本产品采用进口材料和
高强度涤纶高密度编织而成
具有耐高压、耐高低温、耐磨
柔软轻便等特点
适用于大小风炮、汽修、补胎、
焊接等各种场景


This product is made of imported
materials and high strength polyester
high-density woven, with high pressure
resistance, high and low temperature resistance,
wear-resistant, soft and light, suitable for large
and small wind cannon, auto repair, tire repair,
welding and other scenes.

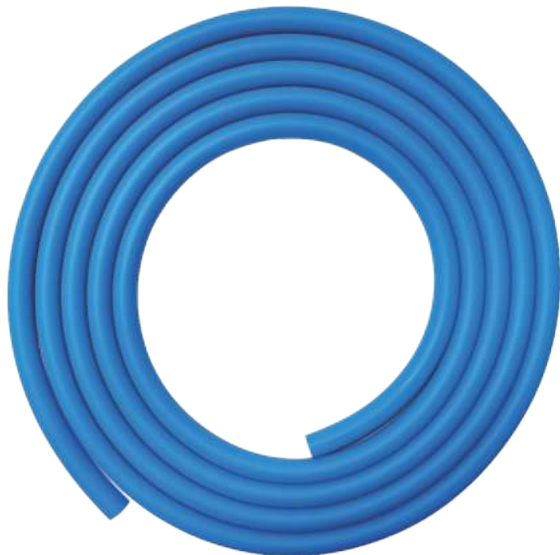

型号 MODEL	内径 mm INSIDE DIAMETER	外径 mm OUTSIDE DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-08-A	8	14	3/450	12/1,800
FY-10-A	10	16	3/450	12/1,800
FY-13-A	13	19	2.5/380	10/1500
FY-16-A	16	23	2.5/380	10/1500

防爆层特写

Close-up of explosion-proof layer



内层PVC

高弹柔软隔绝毒气耐腐蚀
Inner PVC High elasticity soft
insulation gas corrosion resistance

中层防爆层

采用高强度涤纶丝制作
The middle layer is made of high
strength polyester yarn

外层PVC

耐磨，耐高低温
Outer PVC, wear-resistant, high and low
temperature resistance



三胶两线风炮管

Three Rubber Two Wire Air Gun Tube

本产品采用进口材料和
高强度涤纶高密度编织而成
具有耐高压、耐高低温、耐磨
柔软轻便等特点
适用于大小风炮、汽修、补胎、
焊接等各种场景

This product is made of imported
materials and high strength polyester
high-density woven, with high pressure
resistance, high and low temperature resistance,
wear-resistant, soft and light, suitable for large
and small wind cannon, auto repair, tire repair,
welding and other scenes.



型号 MODEL	内径 mm INSIDE DIAMETER	外径 mm OUTSIDE DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-08-B	8	14	3/450	12/1,800
FY-10-B	10	16	3/450	12/1,800
FY-13-B	13	19	2.5/380	10/1500
FY-16-B	16	23	2.5/380	10/1500

内PVC层

耐腐蚀耐油
The inner PVC layer is resistant
to corrosion and oil

内侧防爆层

采用高强度涤纶丝制作
The inner explosion-proof layer is
made of high strength polyester yarn

中层PVC


高弹柔软
Middle layer PVC high
elastic soft

外侧防爆层

采用高强度涤纶丝制作
The outer explosion-proof layer is
made of high strength polyester yarn

外层PVC

耐磨，耐高低温
Outer PVC, wear-resistant, high and low
temperature resistance





耐老化
ANTI-UV



-40~65°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion



黑色橡塑气管

Black Hybrid Air Hose



具有耐超低温，耐磨，高弹性特点，适应各种寒冷环境
可以搭配各种接头以适应不同客户，可以通水气等介质

Super flexible hybrid air hose,
Suitable for different
range of air tools with right fittings

橙色橡塑气管

P-rubber Air Hose



具有耐超低温，耐磨，高弹性轻便特点，适应各种寒冷环境
可以搭配各种接头以适应不同客户，可以通水气等介质

Super flexible hybrid air hose,
Suitable for different
range of air tools with right fittings




型号 MODEL	内径 mm INSIDE DIAMETER	外径 mm OUTSIDE DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-HYA-1/4	6	13	2/300	8/1200
FY-HYA-5/16	7.5	14	2/300	8/1200
FY-HYA-3/8	9	15.5	2/300	8/1200
FY-HYA-1/2	11.8	18.8	2/300	8/1200

内层PVC
耐寒、耐腐蚀
Inner layer anti
cold and corrosion

中层防爆层
采用高强度涤纶丝制作
The middle layer is made of high
strength polyester yarn

外层PVC
耐磨，耐低温
Hybrid material outer layer
makes super flexible



型号 MODEL	内径 mm INSIDE DIAMETER	外径 mm OUTSIDE DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-PRA-1/4	6	13	2/300	8/1200
FY-PRA-5/16	7.5	14	2/300	8/1200
FY-PRA-3/8	9	15.5	2/300	8/1200
FY-PRA-1/2	11.8	18.8	2/300	8/1200

内层
耐寒、耐腐蚀
P-Rubber Inner hose
anti-cold&corrosion

中层防爆层
采用高强度涤纶丝制作
The middle layer is made of high
strength polyester yarn

外层
耐磨，耐低温
Outer flexible layer
anti-cold&abrasion





耐老化
ANTI-UV



-40~65°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion



红色橡胶气管

P-rubber Air Hose



橡胶气管，手感厚重结实
适应更高温度，
适合轻工业使用

EPDM rubber material
heavy duty with,
highstrength , suitable for
light industry



型号 MODEL	内径 mm INSIDE DIAMETER	外径 mm OUTSIDE DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-PRA-1/4	6	13	2/300	8/1200
FY-PRA-5/16	7.5	14	2/300	8/1200
FY-PRA-3/8	9	15.5	2/300	8/1200
FY-PRA-1/2	11.8	18.8	2/300	8/1200

内层橡胶
耐寒、耐腐蚀
Inner rubber layer
Strong & anti-corrosion

中层防爆层
采用高强度涤纶丝制作
The middle layer is made of high
strength polyester yarn

外层橡胶
耐磨，耐低温
Outer flexible layer
anti-cold&abrasion



黄色橡胶气管

Rubber Air Hose



橡胶气管，手感厚重结实
适应更高温度，
适合轻工业使用

EPDM rubber material
heavy duty with,
highstrength , suitable for
light industry



型号 MODEL	内径 mm INSIDE DIAMETER	外径 mm OUTSIDE DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-RAH-1/4	6	13	2/300	8/1200
FY-RAH-5/16	7.5	14	2/300	8/1200
FY-RAH-3/8	9	15.5	2/300	8/1200
FY-RAH-1/2	11.8	18.8	2/300	8/1200

内层橡胶
耐寒、耐腐蚀
Inner rubber layer
Strong & anti-corrosion

中层防爆层
采用高强度涤纶丝制作
The middle layer is made of high
strength polyester yarn

外层橡胶
耐磨，耐低温
Outer rubber layer
anti-cold& abrasion





耐老化
ANTI-UV



-10~65°C
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion



蓝色PVC气管

PVC Air Tool Hose

表面亮光，耐低温，耐磨，
适用于-10°C-65°C环境下，
工作压20bar，爆破压60bar

Made by general PVC material
with different colors and
surface, available for multi
purpose air tools with right fittings



型号 MODEL	内径 mm INSIDE DIAMETER	外径 mm OUTSIDE DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-PAB-1/4	6.5	11	2/300	6/900
FY-PAB-5/16	7.5	12	2/300	6/900
FY-PAB-3/8	9.5	15	2/300	6/900
FY-PAB-1/2	12.5	18.5	2/300	6/900

内层PVC
高弹柔软隔绝毒气耐腐蚀
Inner PVC layer anti-corrosion

中层防爆层
采用高强度涤纶丝制作
The middle layer is made of high
strength polyester yarn

外层PVC
耐磨，耐高低温
Outer PVC layer provide strength
and anti-abrasion



橙色PVC气管

PVC Air Tool Hose

表面亮光，耐低温，耐磨，
适用于-10°C-65°C环境下，
工作压20bar，爆破压60bar

Made by general PVC material
with different colors and
surface, available for multi
purpose air tools with right fittings



型号 MODEL	内径 mm INSIDE DIAMETER	外径 mm OUTSIDE DIAMETER	工作压力 MPa/PSI WORKING PRESSURE	爆破压力 MPa/PSI BURST PRESSURE
FY-PAO-1/4	6.5	11	2/300	6/900
FY-PAO-5/16	7.5	12	2/300	6/900
FY-PAO-3/8	9.5	15	2/300	6/900
FY-PAO-1/2	12.5	18.5	2/300	6/900

内层PVC
高弹柔软隔绝毒气耐腐蚀
Inner PVC layer anti-corrosion

中层防爆层
采用高强度涤纶丝制作
The middle layer is made of high
strength polyester yarn

外层PVC
耐磨，耐高低温
Outer PVC layer provide strength
and anti-abrasion





耐老化
ANTI-UV



-25~65℃
Temperature



抗车压
ANTI-Crushing



防打折
ANTI-Kink



柔软轻便
Flexible



耐磨损
ANTI-Abrasion




电焊机专用气管

Welding Hose

内层防燃气腐蚀TPU
外层阻燃护套
适用于电焊机上的专用气管

Inner layer with anti-gas
corrosion TPU
Outer layer with flame
retardant PVC
Suitable for welding machine

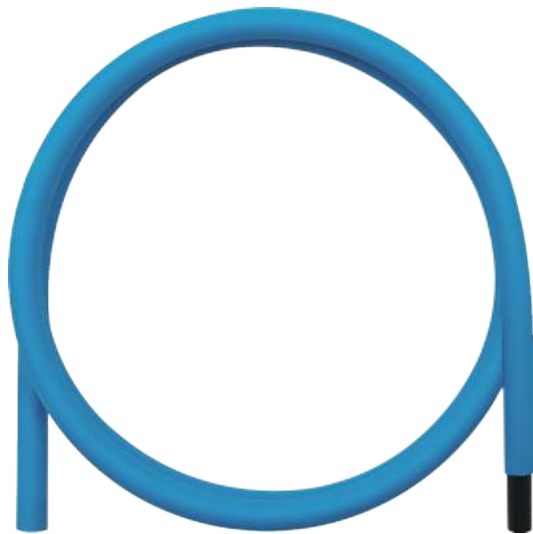

型号 MODEL	内径 mm INNER DIAMETER	外径 mm OUTER DIAMETER	使用压力 MPa/PSI WORKING PRESSURE	最大压力 MPa/PSI BURST PRESSURE
FY-WH-1/2	6.5	12	0.6/90	2/300
FY-WH-5/8	8	14	0.6/90	2/300
FY-WH-3/4	10	17	0.6/90	2/300

TPU耐燃气内层
防燃气泄漏、耐腐蚀
TPU inner layer
Anti-leakage&corrosion

阻燃护套外层
防燃烧、防飞溅火花引火、更安全
PVC outer layer flame retardant with more safe



室内燃气管

Gas Hose

内层黑色耐燃气腐蚀
中层白色耐燃气腐蚀
外层防脏污、耐腐蚀、防鼠咬
适用于室内燃气

Flexible Eco gas hose,
suitable for indoor and outdoor gas
supply ,safe and stable



型号 MODEL	内径 mm INNER DIAMETER	外径 mm OUTER DIAMETER	使用压力 MPa/PSI WORKING PRESSURE	最大压力 MPa/PSI BURST PRESSURE
FY-GAS-9.5	9.5	15.5	0.01/1.5	0.3/45
FY-GAS-13	13	19.6	0.01/1.5	0.3/45

TPE耐燃气内层
防燃气泄漏、耐腐蚀
P-Rubber inner hose
anti-leakage&corrosion

耐燃气腐蚀中层
高弹柔软、耐磨、不易变形
P-Rubber anti-corrosion
middle layer with colors

透明耐脏污外层
表面污渍容易去除，使用起来更加方便
Transparent outer PVC protection layer

